

PREMIER^(C) FACE LOUVERS

Specifications:



Frame: Aluminum alloy
5052H32, .080 thick.
MIG welded at corners.

Blades: Aluminum alloy
5052-H32, .080 thick.
MIG welded to frame.

Birdscreen: Aluminum
perforated sheet, 1/4"
opening. open area
not less than 76%.
Mounted to inside
(air discharge) side of
louver panel.

Sizes: "W" equal width "H"
equals height. Made
to custom size. Depth
is 6" typically or as
specified.

Lifting Lugs: provided on
louvers weighing over
200 lbs. if specified.

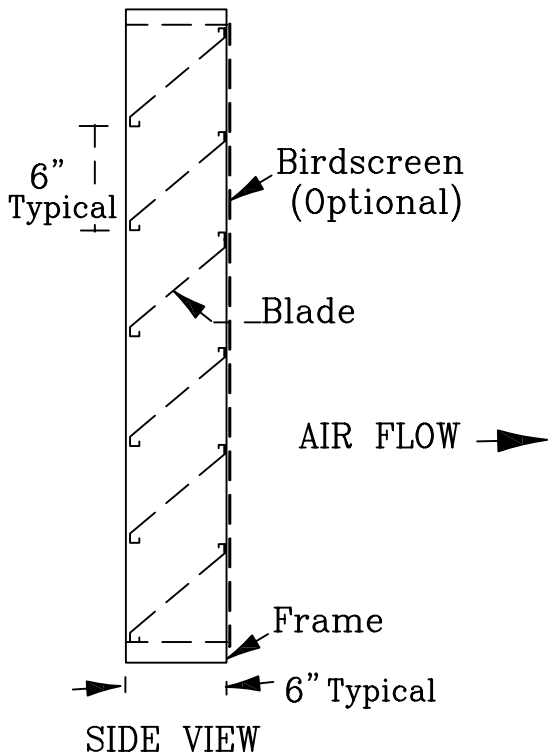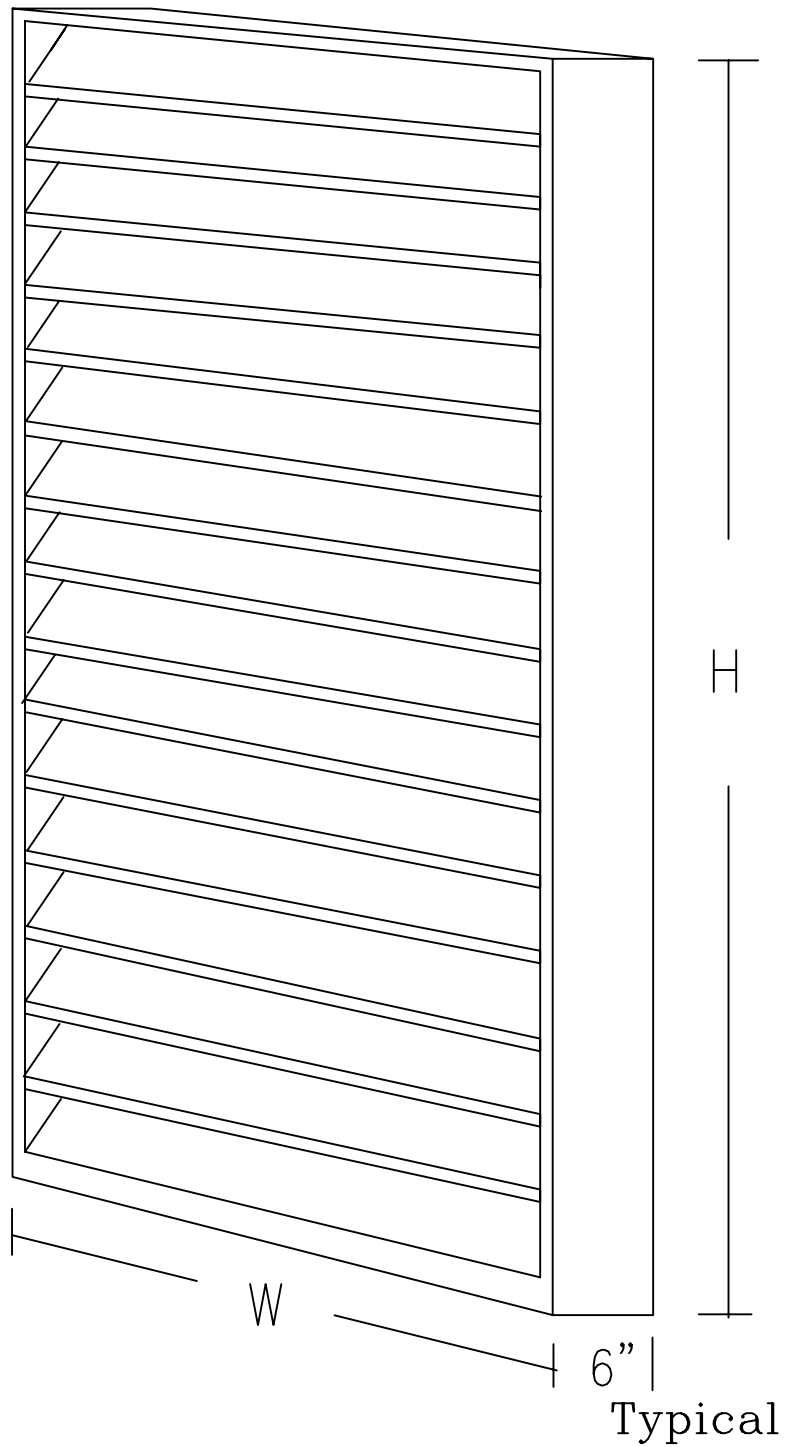

NOTES:	REVISIONS:	Premier Industries, Inc.
		11050 N. 22nd Ave., Phoenix, AZ 85029
		Aluminum face louvers
		REF: louvers .dwg